

SWOSC-V

1/5

Oil tempered SiCr-alloyed valve spring wire
Only manufactured in China

SWOSC-V is a Super Clean steel, especially intended for the manufacture of valve springs and other springs requiring high fatigue properties and good relaxation properties at moderately increased working temperature.

The wire is manufactured in shaved condition in sizes from \varnothing 1.60 mm to 6.50 mm, or in egg or elliptical shape (corresponding to round cross section 2.50 mm to 6.50 mm). Other wire sizes on request.

CHEMISCHE ZUSAMMENSETZUNG

C (%)	Si (%)	Mn (%)	P max. (%)	S max. (%)	Cr (%)
0,50 - 0,60	1,20 - 1,60	0,50 - 0,80	0,025	0,020	0,50 - 0,80

REINHEITSGRAD IM STAHL

The presence of non-metallic inclusions in the wire rod is inspected for every heat of SWOSC-V in accordance with the Suzuki Garphyttan method by the steel supplier.

Before release for production, Suzuki Garphyttan performs non-metallic inclusion inspection for every fifth heat. The criteria for supplier inspection and releasing inspection are the following;

For wire rod samples: Inclusion size max. 15 μ m down to 1 mm below surface. Inspection area: 1 000 mm².

Inclusion size, surface	5-10 μ m	>10-15 μ m	>15 μ m
Max. number of inclusions	50	7	0

For SWOSC-V, every heat is inspected including a SEM-EDS analysis of inclusions > 10 μ m to verify a Super Clean composition.

As stated by IVSWMA, International Valve Spring Wire Manufacturers Association, it is likely to find occasional inclusions in valve spring quality steel of a size larger than 30 μ m.

SWOSC-V

2/5

MECHANISCHE EIGENSCHAFTEN

- 1) Other wire sizes on request.
- 2) Ovality, i. e. the difference between the largest and smallest dimension of a cross section, is maximum half the tolerance range.
- 3) Conversion from tensile strength to hardness values can be calculated in standard ISO EN 18265. The tensile strength R_m within one coil does not vary more than 50 N/Mm^2 .
- 4) Torsion test is carried out for assessing deformability. The fracture of the torsion test piece shall be smooth and perpendicular to the wire axis. The rupture shall show no longitudinal cracks.

FÜR RUNDdraHT

Durchmesser (mm)	Toleranz (mm)	Zugfestigkeit (N/mm ²)	Torsionen (l=300 mm, min. revs)	Brucheinschnürung (min. %)
1,60 - 2,00	±0,020	2010 - 2160	5	50
2,01 - 2,50	±0,020	1960 - 2060	5	50
2,51 - 3,00	±0,020	1910 - 2010	4	50
3,01 - 3,20	±0,020	1910 - 2010	4	45
3,21 - 3,50	±0,025	1910 - 2010	4	45
3,51 - 4,50	±0,025	1860 - 1960	4	45
4,51 - 5,00	±0,025	1810 - 1910	3	45
5,01 - 5,60	±0,030	1810 - 1910	3	40
5,61 - 6,00	±0,035	1760 - 1860	3	40
6,01 - 6,50	±0,035	1760 - 1860		40

STRECKGRENZE

The proof stress $R_{p0.2}$ is min. $0.9 \times$ tensile strength of the wire.

SWOSC-V

3/5

OBERFLÄCHENBESCHAFFENHEITEN

OBERFLÄCHENBESCHAFFENHEIT

Surface condition – non-destructive testing

In the standard size range 2.00 - 6.00 mm the wire is tested continuously in Eddy Current equipment to a surface level of ≥ 40 microns. Other wire sizes on request.

Surface condition – end sample test

The wire is end sample tested by means of etch testing and binocular inspection as well as microscopical inspection of the material structure.

Max. permissible depth of partial surface decarburization and surface defects, 1 % x wire diameter. In shaved condition; for diameters ≤ 2.00 mm 10 μm , for diameters > 2.00 mm 0.5% x d.

PHYSIKALISCHE EIGENSCHAFTEN

E UND G ELASTIZITÄTSMODUL

206 kN/mm²

E UND G SCHUBMODUL

79.5 kN/mm²

STANDARDS

NÄCHSTÄHNLICHE VERGLEICHBARE STAHLGÜTEN

EN VDSiCr, SIS 142090-05

NÄCHSTÄHNLICHE VERGLEICHBARE NORMEN

EN 10270-2, ASTM A877, BS 2803 685A55HD, JIS G3561 SWOSC-V

EMPFEHLUNGEN

WÄRMEBEHANDLUNG

As soon as possible after coiling, the springs should be stress relieved.

WARMVORSETZEN

After shot peening, the springs should be hot preset or stress relieved. In order to reach optimum fatigue and relaxation properties, the springs must be preset at an appropriate stress.

KUGELSTRAHLEN

In order to obtain optimum fatigue properties, the process time should be adjusted to get a complete treatment. Size of shots should be adapted to wire dimension, pitch and shot peening equipment.

Shot peening of the inside of the spring coils is particularly critical.

For further technical support, please contact Suzuki Garphyttan or visit www.suzuki-garphyttan.com for more information

SWOSC-V

4/5

BEDINGUNGEN FÜR FEDERVERSUCHE

Spring conditions for fatigue and relaxation tests (specially designed test spring) Diagram 1 and 2:	
Wire size	Ø 4.00 mm
Diameter external	28.00 mm
Spring length, l0	59.5 mm
N active	4.80
Spring index	6.0
Shot peening	Speed 48 m/sec. for 20 minutes, size of shots 0.8 mm
Hardness of Shot-peening grit (shot):	610-670 Hv
Aim for Almen arc-height	Min. 0.40-0.45 mm
Hot presetting (theoretically set)	1200 N/mm ²
Temperature	200°C (max. 250°C)
Time	10 minutes

The presence of non-metallic inclusions in the wire rod is inspected for every heat of SWOSC-V in accordance with the Suzuki Garphyttan method by the steel supplier. Before release for production, Suzuki Garphyttan performs non-metallic inclusion inspection for every fifth heat. The criteria for supplier inspection and releasing inspection are the following; For wire rod samples: Inclusion size max. 15 µm down to 1 mm below surface. Inspection area: 1 000 mm².

Inclusion size, surface	5-10 µm	>10-15 µm	>15 µm
Max. number of inclusions	50	7	0



For SWOSC-V, every heat is inspected including a SEM-EDS analysis of inclusions > 10µm to verify a Super Clean composition.

As stated by IVSWMA, International Valve Spring Wire Manufacturers Association, it is likely to find occasional inclusions in valve spring quality steel of a size larger than 30 µm.

RELAXATIONS- UND ERMÜDUNGSEIGENSCHAFTEN

SWOSC-V

5/5

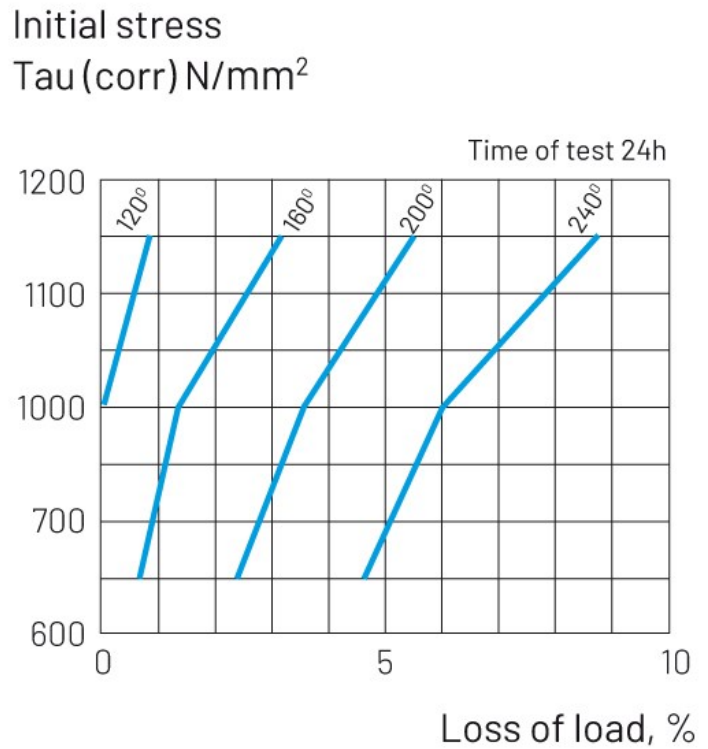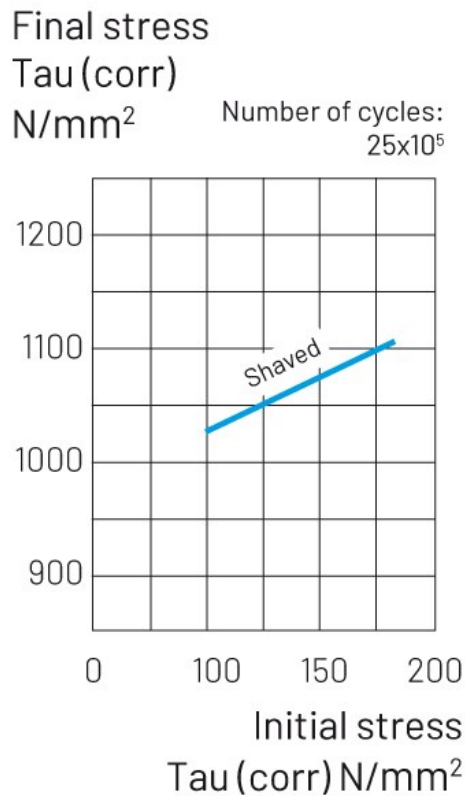

In diagram 1 the fatigue properties of this grade are illustrated in a Goodman-diagram, based on a special test spring design.

Diagram 2 shows the relaxation properties (loss of load) of springs made from SWOSC-V wire subjected to static compression at different temperatures.

ZUSÄTZLICH

ZUSÄTZLICHE INFORMATIONEN

Delivery forms

See separate sheet.